



COMPLIANCE:

- ICAO Annex.14 Vol.1
- FAA AC 150/5345-46
- IEC-TS 61827
- EASA: CS-ADR-DSN
- STANAG 3316
- AENA PPT-013_03-12



BOARDING TIME

BOARDING PASS

NAME OF PASSANGER

FROM:

TO:

DATE

FLIGHT
GAES2020

GATE

23

SEAT

21B

GATE CLOSSES 30 MINUTES BEFORE DEPARTURE

GOMINTEC

BOARDING PASS

GOMINTEC

Uses

LED in-pavement rapid exit taxiway indicator light for airports CAT I, II & III, according to ICAO, Figures A2-6 & A2-7.

Features

- 8" external diameter, with upper and lower cover manufactured on high strength forged aluminum, and only 6mm of profile over pavement.
- Stainless steel hardware.
- Uni-directional and bi-directional configuration.
- Surface treatment to prevent the wear and increase the corrosion resistance, which makes it especially resistant to dust and water.
- Smooth surface without sharpened edges to avoid damages at the aircraft tyres.
- Regulation according to FAA EB67E equivalent to a halogen lamp.
- Integrated surge protection.
- Efficient control of LEDs operating temperature, increasing the light life and avoid color change.
- High features optical design.
- Compatible with existing circuits of visual aids.

Specifications

- Power: 2.8A ~ 6.6A, according to FAA EB67D.
- Average life: minimum 60.000h at maximum brightness and 100.000h in a normal operating conditions.
- Color: Yellow
- Consumption: 15VA ; FP >0,95
- Index Protection: IP68.

Order Code

RAPS-08 - LED - Y - X

Type *RAPS-08 = 8" rapid exit taxiway indicator light*

Light source *LED = LED lamp*

Beam color *Y = Yellow*

Optional Function *M = Single lamp fault detection function
A = Artic kit*



Installation

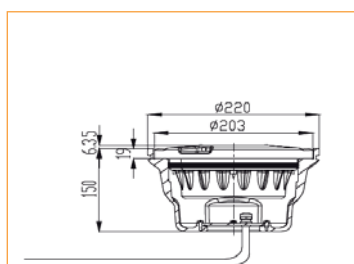


Figure 1
On 8" shallow base




Figure 2
*On 12" shallow base with
12"/8" adapter ring*


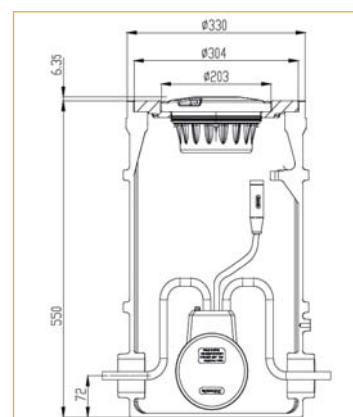


Figure 3
*On 12" deep base with
12"/8" adapter ring*

Photometry

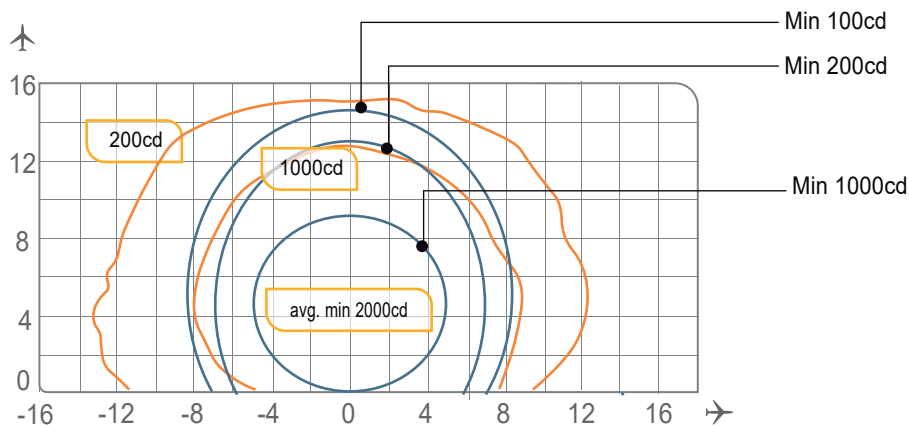


RAPS-08-LED, ICAO Fig. A2-7, Amarillo

Application		Main beam		Color	Required min. avg. cd.	Actual avg. cd.
		H	V			
RAPS-08-LED	ICAO Fig A2-7	±5°	0° a 9°	Yellow	2.000	3.136
	ICAO Fig A2-6	±5°	0° a 7°	Yellow	2.000	3.058



Structure

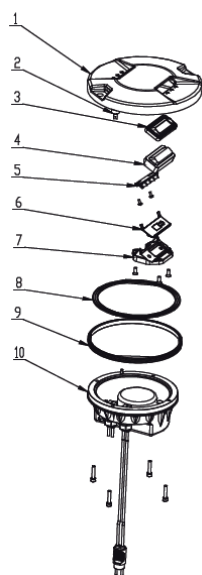

- 1 Upper cover
- 2 Thermal switch
- 3 Prism gasket sleeve
- 4 Prism
- 5 LED lamp assy
- 6 Prism gasket
- 7 Prism pressing bracket
- 8 Light body gasket
- 9 Lighting fixture gasket
- 10 Inner cover assy

Spare Parts

N°	Order No.	Description
3	43117	Prism gasket sleeve
4	31158	Prism
5	932053-RAPS-Y	LED lamp assy RAPS-Y
6	43316	Prism gasket
7	43241	Prism pressing bracket
8	41141	Light body gasket
9	41107	Light fixture gasket

Accessories

N°	Order No.	Description
1	SB-08	8" shallow base
2	SB-12	12" shallow base
3	DB-12	12" deep base
4	AR-12/08	12"/8" adaptor ring
5	951101	8" lamp handle
6	ITF-025-066	25W isolation transformer
7	REC7	Secondary cable connector style 7



Weight and Dimensions

	Base	8" shallow base
Packaging size	210x210x130mm ³	240x240x180mm ³
Weight	3,5 kg	6,5 kg